

IVENT ROTO PG (OBLONG)

Technical data sheet and performance declaration.

The iVent ROTO active ventilation system with a wind powered turbine is a cutting-edge solution where effective ventilation is required in kitchens or bathrooms.

The iVent ROTO offers a best combination of non-compromise functionality, durability, and easy installation. The angle of attack of the turbine blades together with the rotation creates an effective airflow optimization for superior ventilation performance in the duct. Equipped with a condensate drainage system, it prevents the accumulation of moisture in the duct or house structure. Built-in spirit levels ensure easy vertical position and adjustment during installation.

TECHNICAL DATA

| | |
|--|---------------------------------------|
| MATERIAL | UV stable pure Polypropylene |
| HEIGHT | 20,3/4" |
| VENT INTAKE PIPE | 4", 5", 6" |
| WEIGHT | 5 lbs |
| ROOF TYPE INSTALLATION | SHINGLE, SLATE AND SHAKE INSTALLATION |
| TYPE | IVENT ROTO OBLONG |
| ROOF PITCH REGULATION | 1:12 TO 12:12 PITCH |
| PRODUCER | ROOFIVENT LLC |
| SKU | RLP-X-XX-PG |
| TECHNICAL AND PERFORMANCE ASSIGNMENT UNIT | ITB |




| | | | | |
|-------------|-------------|------------|----------------|------------|
| Brown 01 | Black 02 | Clay 06 | Graphite 09 | Gray 10 |
|-------------|-------------|------------|----------------|------------|

| | |
|------------------------------------|--|
| IDENTIFICATION PRODUCT CODE | RLP-X-01-PG (Brown) RLP-X-02-PG (Black) RLP-X-06-PG (Clay) RLP-X-09-PG (Graphite) RLP-X-10-PG (Light Gray) |
|------------------------------------|--|

| | |
|---------------------------------|----|
| INSTALLATION FLANGE SIZE | 4" |
|---------------------------------|----|

| | |
|--------------------|---|
| Attachement | <ul style="list-style-type: none"> • Verification of constancy of performance • Aerodynamical performance |
|--------------------|---|

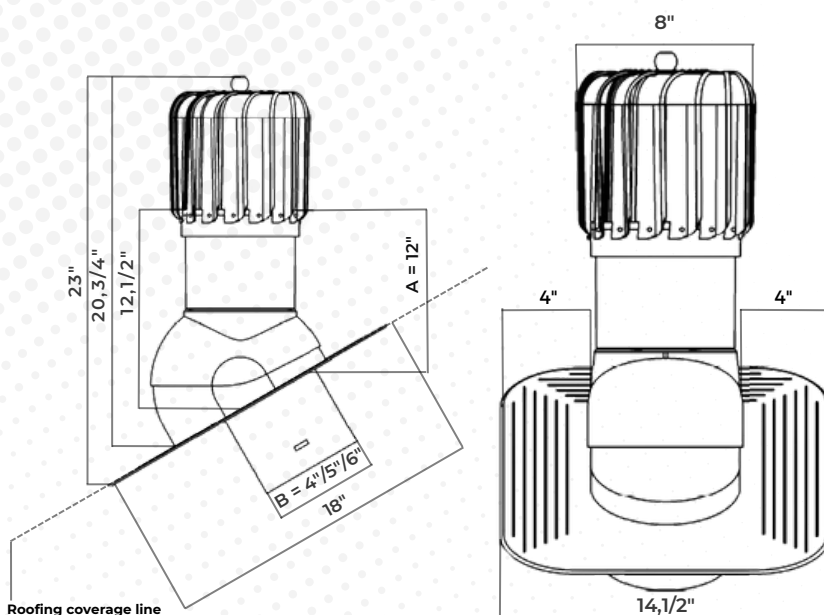

LIFETIME GUARANTEE Roofivent LLC lifetime guarantee on functionality. Guarantee doesn't include replacement due to destructive storms.



The performance of the above product is in accordance with the set of declared performance characteristics. This declaration of performance is issued on the basis of tests and technical assessment by ITB. Under the sole responsibility of the manufacturer - ROOFIVENT LLC.

DATA TABLE SHEET


| CHARACTERISTICS | PERFORMANCE PROPERTIES | ASSESSMENTS METHODS |
|---|---|---|
| Dimensions : • Height (A) • Inside diameter (B) | Attachement -A Dimensions | Measurement with measuring instrument with adequate accuracy |
| Vicat softening temperature of PP products: Fahrenheit | >167 | ISO 306:2014 (method B50) |
| Changes as result of heating Polypropylene product | No cracks, delamination and sign of material fission or bubbles greater than 20% of the wall thickness: No part of the seam line exhibits an opening greater than 20% of the wall thickness | ISO 580:2006 method A: dryer Temperature: 300 F Time of heating: 30 min |
| Impact strength of Polypropylene product | No damages | Drop method according to C-89206-2005 Temperature: 32 F Conditioning time: 30 min Drop height: 7 feet |
| Aerodynamic characteristics | Attachment - B | |
| Suction action | Attachment - B | |
| Durability of Polypropylene products - resistance to aging in artificial conditions, with irradiation energy not lower than 2.6 GJ/sq. feet | Delta E < 6 | Method: A Type of lamps: xenon ARC Filter: external, type 300 (cuts off radiation below 300 nm) Irradiance: 60 W/Sq.Feet (measured at 300-400 nm wavelength) BST temperature: 145+37 F (dry period) Chamber temperature: 100+37 F (dry period) Exposure conditions: one cycle included 102 minutes of exposure in a dry enviroment and 18 minutes of exposure in a humid enviroment |

Package includes: IVENT ROTO vent, base for shingle, slate and shake installation, ventilation pipe, set of screws, installation instructions

| Aerodynamical performance | | Kitchen and Bathroom exhaust vent | |
|--|--------------|--------------------------------------|-----------------------|
| | | SPEED M/h (differential pressure) | CFM (Cubic Feet/Min.) |
| Product | Dimension | | |
| IVENT ROTO | 6" / 5" / 4" | 6.34 | 78,96 |
| | | 8.96 | 110.67 |
| | | 12.67 | 155.19 |
| | | 20.04 | 242.76 |
| SUCTION PERFORMANCE | | WIND SPEED | 9 M/h |
| | | EFFICIENCY | 117,6 CFM |
| Negative pressure developed by the turbine in the 6"duct | | | 7,0 Pa |

IVENT ROTO - AERODYNAMIC PERFORMANCE

| Pressure coefficient C | | | | | | | |
|---------------------------|----------------------|-------|-------|-------|-------|-------|-------|
| Product Volume Flow | Wind speed 18 mile/h | | | | | | |
| | Angle of wind | | | | | | |
| | CFM | - 45° | - 30° | - 15° | 0° | 15° | 30° |
| 0 | -5.40 | -5.90 | -5.80 | -5.40 | -4.70 | -3.30 | -1.10 |
| 32 | -5.30 | -5.70 | -5.40 | -5.20 | -4.20 | -3.00 | -1.00 |
| 64 | -4.90 | -5.20 | -5.10 | -4.80 | -3.60 | -2.30 | 0.90 |
| 95 | -4.30 | -4.60 | -4.50 | -4.80 | -2.70 | -0.60 | 2.00 |
| 127 | -3.30 | -3.60 | -3.80 | -3.60 | -0.90 | 2.50 | 3.00 |
| 255 | 6.10 | 6.10 | 4.70 | 4.40 | 5.60 | 6.80 | 6.80 |
| 509 | 14.90 | 14.80 | 12.10 | 11.50 | 11.30 | 14.10 | 14.10 |
| 1018 | 30.80 | 30.20 | 24.50 | 23.40 | 21.10 | 27.90 | 28.60 |

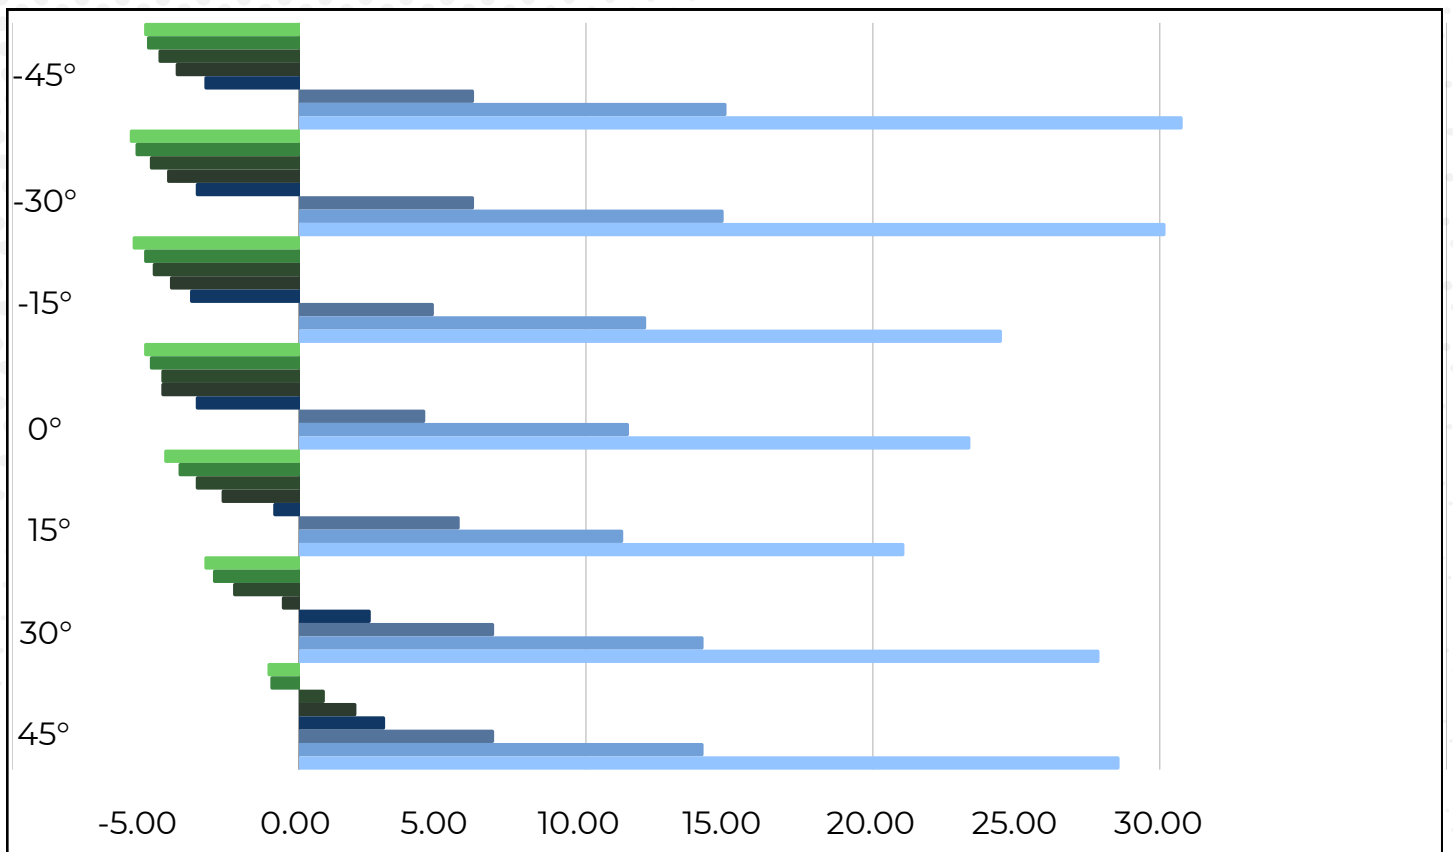

Package includes: IVENT ROTO vent, base for shingle, slate and shake installation, ventilation pipe, set of screws, installation instructions

The Ivent ROTO active ventilation system with a wind powered turbine is a cutting-edge solution where effective ventilation is required in kitchens or bathrooms.

The Ivent ROTO offers a best combination of non-compromise functionality, durability, and easy installation. The angle of attack of the turbine blades together with the rotation creates an effective airflow optimization for superior ventilation performance in the duct or ventilated areas. Equipped with a condensate drainage system, it prevents the accumulation of moisture in the duct or house structure. Built-in spirit levels ensure easy vertical position and adjustment during installation.

Key Features:

- Condensation Drainage System:
- Equipped with a condensation drain system to protect the unit from moisture and frost, ensuring year-round dryness and operational efficiency.
- Maintains longevity and efficiency of the vent, making it a reliable choice for kitchen and bathroom ventilation needs.
- Ball Bearings:
- Superior encapsulated bearing system with two bearings immersed in high-quality oil for smooth and silent operation.
- Guarantees durability, reliability, and optimal performance for an extended product life.

Installation:

- Designed for easy and reliable installation, allowing for simple disassembly without roof intervention for inspection and maintenance.
- Base options for shingles, slate, or shakes with a 4" flange for reliable incorporation and connection with roofing materials.

Bubble Level:

- Built-in bubble level ensures precise vertical positioning during installation, saving time and money by eliminating the need for adjustments.
- Guarantees professional and accurate placement every time.



The Ivent ROTO Vent is the best choice for those who looking for superior reliability and an unrivaled efficiency ventilation solution that is easy to install and built to last.

Package includes: IVENT ROTO vent, base for shingle, slate and shake installation, ventilation pipe, set of screws, installation instructions