

INSTALLATION INSTRUCTION





Cable penetration


1. The package contains base, body and accessories.

2. Install the base:


1. Place the base where it is to be installed. Mark the hole in the cover by drawing it from inside the vent base (pic.1)
2. Drill several nail holes in to the third row of the flat part of the base (pic. 2/3)
3. Cut out the hole marked on the roof (pic. 4, 5). When cutting, remember to use the appropriate tools for the material being cut.
4. Clean the surface around the opening and then apply sealing (roofing sealant - not included) to the prepared surface (pic. 6). Evenly press the base and then fasten with roofing nails through the predrilled holes (pic. 7).
5. Cover the flat part of the base with bitumen sealant (pic. 8) and replace the shingles/roofing felt, that has been pre-cut around the protruding element of the base (pic. 9).

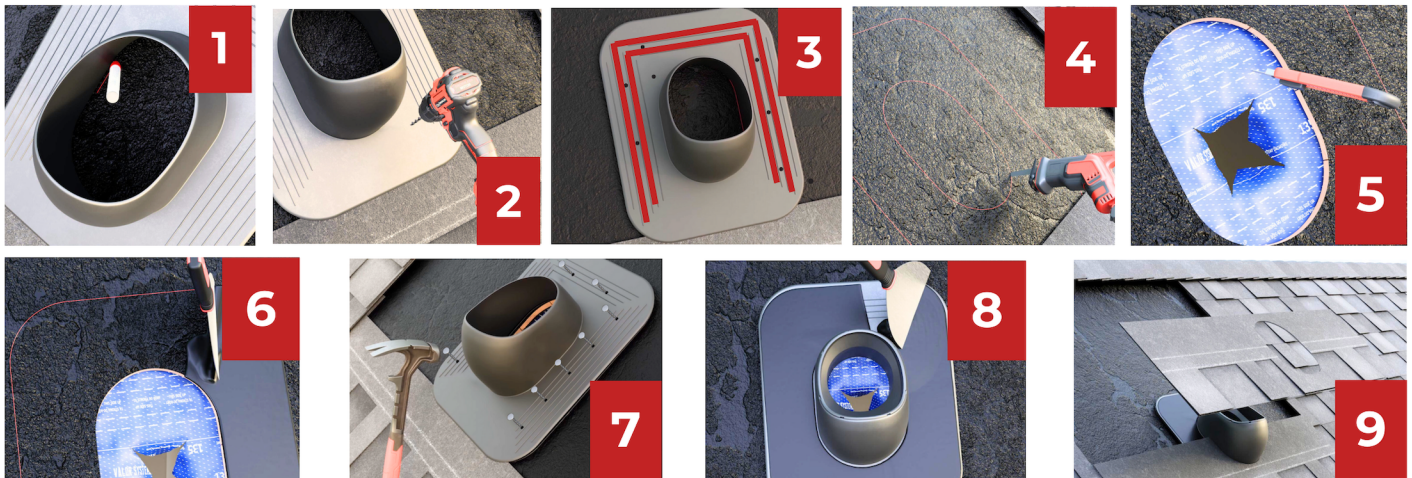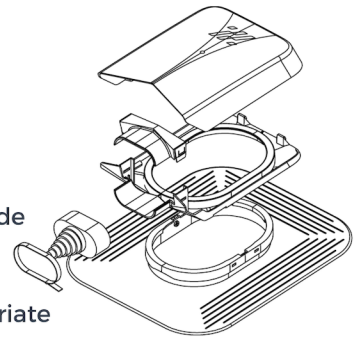


3. Click the body to the base.

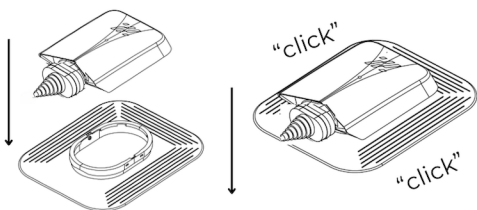

4. Unclick the top of the body.

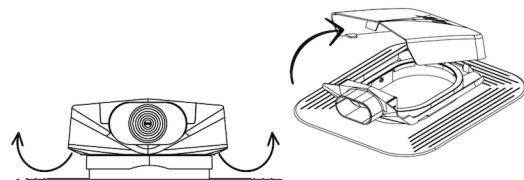


5. Unclick the cable outlet for easy cable installation.

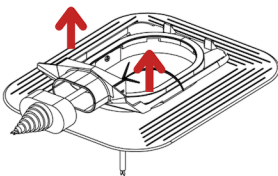


6. Install the cable.

7. Click back the cable outlet.



8. Make a tight hole in the EPDM gasket for the cable. Thread the seal onto the cable and slide it onto the cable outlet. The joint between the cable outlet of the body and EPDM seal must be sealed with roofing sealant. Secure the connection with the zip tape.

9. Click the top cover of the body on.

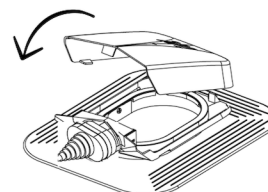

LIFETIME GUARANTEE

Roofivent LLC give lifetime guarantee on functionality of these products. Guarantee doesn't include replacement due to destructive storms. In case of any problem with Roofivent products, contact us: office@roofivent.com.

www.roofivent.com

